



PERFORMANCE SERIES

Premium Reliability.

ULTRA FLEXIBLE HIGH SPEED HDMI™
CABLE – 4K 60HZ IN-WALL, CMG (FT4) RATED

C2G Performance Series Ultra Flexible High Speed HDMI™ Cables extend signals over a high-performance HDMI cable and support HDMI audio and video features including 4K Ultra HD.

These cables are perfect for connecting a wide variety of devices from computers to projectors and monitors, AV presentation furniture, or in-wall applications requiring high speed HDMI features and video resolutions up to 4K (4096 x 2160) at 60Hz — perfect for conference rooms, classrooms, houses of worship, and other commercial installations.

This Ultra Flexible High Speed HDMI Cable was designed for installations in tight spaces and offers commercial grade connectors that feature compact overmolding for high density environments, integrated finger grips on the top, bottom, and sides, for easy insertion and removal, and the gripping connector shell has 2x greater port retention to keep your devices connected. The gold plated connectors on the cable allow for better shielding, increased electrical conductivity, and durability.

C2G Performance Series Ultra Flexible High Speed HDMI Cable supports Consumer Electronic Control (CEC) commands, allowing communication between devices connected through the HDMI ports. Lastly, this fully-functional, high bandwidth cable has been tested to perform at industry standards and is backed by a lifetime warranty.





PERFORMANCE SERIES

Premium Reliability.

ULTRA FLEXIBLE HIGH SPEED HDMI™
CABLE – 4K 60HZ IN-WALL, CMG (FT4) RATED

FEATURES

- Supports all HDMI™ 2.0 features including resolutions up to 4K (4096 x 2160) at 60Hz, which means higher quality video for viewing your screen content
- In-wall (CMG/FT4) rated jacket, so you can safely run the cable inside of a wall and have a clutter-free, clean look
- Integrated finger grips on the connectors for easy insertion and removal
- Gripping connector shell for 2x greater port retention
- Gold-plated connectors for increased electrical conductivity and enhanced durability
- Supports CEC extensions for control of consumer electronics devices through a single control point
- Backed by a Lifetime Warranty for peace of mind

PERFORMANCE SERIES ULTRA FLEXIBLE HIGH SPEED HDMI CABLE	
C2G10373	1ft (0.3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
C2G10374	18in (0.5m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
C2G10375	2ft (0.6m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
C2G10376	3ft (0.9m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
C2G10377	6ft (1.8m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated
C2G10378	10ft (3m) C2G Performance Series Ultra Flexible High Speed HDMI Cable - 4K 60Hz In-Wall, CMG (FT4) Rated



PERFORMANCE SERIES

Premium Reliability.

ULTRA FLEXIBLE HIGH SPEED HDMI™
CABLE – 4K 60HZ IN-WALL, CMG (FT4) RATED

SIGNAL SPECIFICATIONS	Supports HDMI Resolutions up to 4K 60Hz, 4:4:4, 18 Gbps	
	Supports Full HD Blu-ray Disc and HD DVD Video	
	Supports 3D Video	
	Perceptual Quantizer (PQ) HDR OETF (SMPTE ST 2084)	
	Hybrid Log-Gamma (HLG) HDR OETF	
	Static HDR Metadata (SMPTE ST 2086)	
	DVD Audio, Super Audio CD (DSD)	
	Dolby® True HD, DTS-HD Master Audio Bitstream Capable	
	4 Audio Streams	
	Ethernet Channel	100 Mbit/s
Consumer Electronic Control (CEC)		
ELECTRICAL SPECIFICATIONS	Voltage Rating	30V
	Temp Connector	Temp Rating: 220°C
	Cable	Temp Rating: 75°C
	Conductor Resistance	5Ω
	Insulation Resistance	10MΩ
	Differential Data Input	Voltage: 4.8V to 5.3V
	Differential Data Output	Voltage: 4.7 to 5.3V
PHYSICAL SPECIFICATIONS	Operating Temperature	-20°C to +75°C; 85% RH (Non-Condensing)
	Storage Temperature	-10°C to +55°C; 85% RH (Non-Condensing)
	Tensile Strength	100N
	Minimum Bend Radius	48mm
	Cable Jacket Ratings	CMG FT4
	Connector Gripping Force	HDMI Withdrawal Force: 3.12 to 3.28kgf (9.8N/1.0kgf Min; 39.2N/4.0kgf Max)
	Connector Gripping Force	HDMI Insertion Force: 2.54 to 2.61kgf (44.1N/4.5kgf Max)
PHYSICAL CHARACTERISTICS	Material Housing	PVC Molding
	SR-Mold	PVC, Color: Black
	Jacket Color	Black
	Connector Insulator	Blue; Front of the Housing: Blue; "C2G"
	Jacket OD	6.00±0.20mm; Jacket Material: PVC; Jacket Thickness: 0.56mm (REF)
	Shield Drain	7/0.10T (30AWG); Shield AL/Mylar: AL Face Inside; Shield Mylar; Transparent Mylar Tape
	Connector	HDMI Type A Male Connector, Metal Shell Gold Plated, Electrical Contact Copper; Alloy Gold Plated 5u', Insulator Color: Blue
	Cable Markings	High Speed HDMI Cable With Ethernet E468040 (UL) CL2 75°C
	Product is CE Marked and Conforms to 2011/65/EU ROHS 2	




PERFORMANCE SERIES

Premium Reliability.

ULTRA FLEXIBLE HIGH SPEED HDMI™
CABLE - 4K 60HZ IN-WALL, CMG (FT4) RATED

TECHNICAL DRAWING

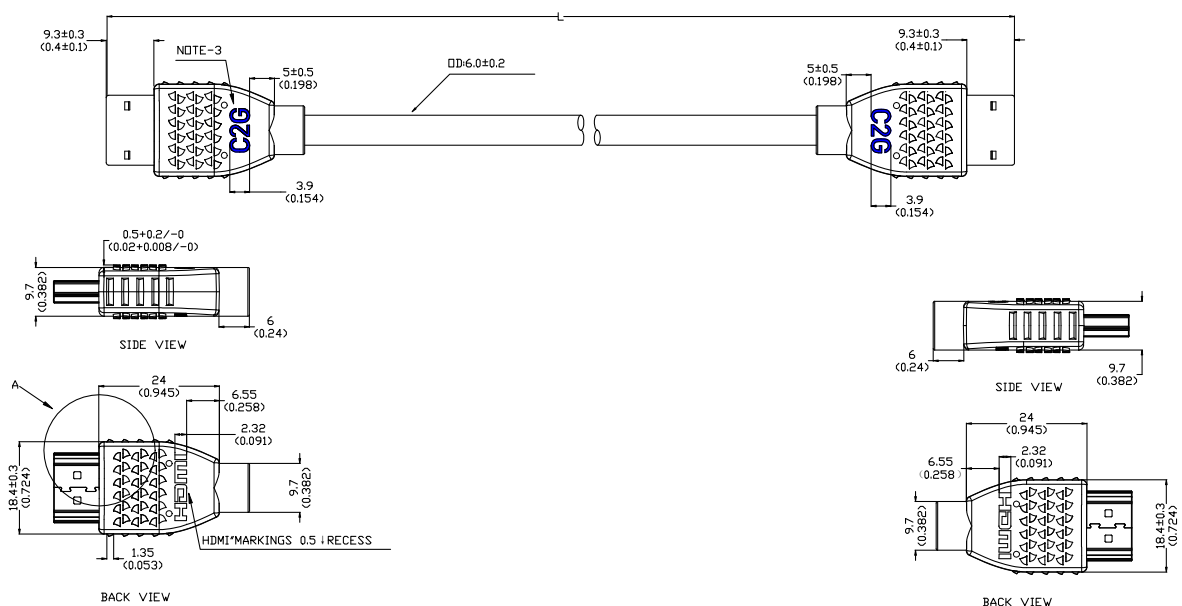

LEGRAND | AV COMMERCIAL BRANDS
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | legrandav.com | c2g.emea@av.legrand.com

©2021 - 2024 Legrand AV Inc. 240048 Rev B 10/24 C2G, Chief, Da-Lite, Luxul, Middle Atlantic, Vaddio, and Wiremold are registered trademarks of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.